



# Stabilized film for solarization

## TECHNICAL PRODUCT INFORMATION

Product: Stabilized film for solarization


Catalog Number: E1324

Product description: Clear Stabilized film for solarization. The plastic sheets allow the sun's radiant energy to be trapped in the soil and heating the soil. Solarization during the hot summer months can increase soil temperature to levels that kill many diseases and weed seed. Soil solarization also improves soil structure and increases the availability of nitrogen (N) and other essential plant nutrients. Solarization is a simple, safe, and effective method that has been used with field, vegetable, and flower crops. It can be combined with organic soil amendments or reduced rates of pesticide application for greater effectiveness. The plastic sheets should be left in place for 4 to 8 weeks to allow the soil to heat to the greatest depth possible.

Thickness: 30-40  $\mu$

UV Resistance: 12 months

Property	Test Method	Units	Value
Tensile Strength at break [MD]	ASTM D-882	MPa.	20
Tensile Strength at break [TD]	ASTM D-882	MPa.	18
Elongation at break [MD]	ASTM D-882	%	300
Elongation at break [TD]	ASTM D-882	%	500
Falling Dart Impact	ASTM D-1709	gr.	100
Total light transmission	EN 13206	%	90
Thickness average	EN 13206	%	$\pm 5$ on nominal
Thickness tolerance	EN 13206	%	$\pm 15\%$ on each point

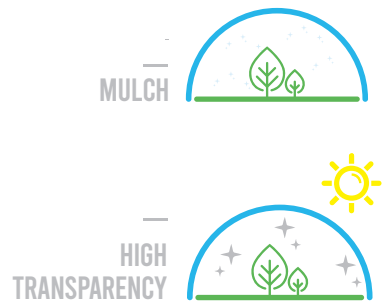

**Kibbutz Einat P.O.B 3 | Einat 4880500 Israel | Tel :+972-3-9016060 | Fax:+972-3-9016040**

All statements, information and data given herein are believed to be accurate a reliable, but are presented without guaranty, warranty or responsibility any kind, express or limited. Statement or suggestion concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement, and are not recommendation to infringe any patent. The user should not assume that all safety measures are indicated, or that other measures may not be required